

Product information

Metra-flow OG7 500 L/Min oval gear meter

- Excellent chemical resistance
- Rugged construction
- Individual calibration
- High viscosity capability
- Low pressure loss
- No flow conditioning required
- Hall or reed switch sensor
- Accuracy 1.0% reading water
0.5% reading oil
- $\pm 0.25\%$ reading *
- 0.1% repeatability
- IP67/NEMA 4 protection
- Models to 400 Bar


* When used with our metra-smart instrument

Ideal for


- ◆ Engine test
- ◆ Oil flow
- ◆ High viscosity fluids
- ◆ OEM equipment





The rugged OG7 oval gear flowmeter is designed to give high performance with a low cost of ownership. It has a standard flow range from 5 to 500 L/Min on 30 Cstk oil and 20 to 500 L/min on water like liquids. It can have totally non-metallic wetted components, PEEK™, ceramic and an elastomer which makes this the ideal choice for the metering of aggressive chemicals. The standard inlet and outlet are 2" female threads. For OEM use other alternatives, including manifold mountings, are available. The standard model is 316 St St with Viton™ 'O' ring seal.

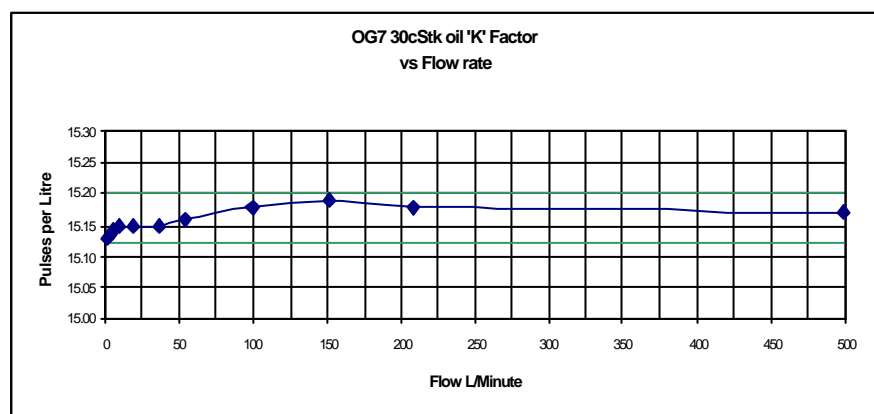

Sample product code →	Stainless standard OG7-SS5-VHD-B
Flow range - Water - 30 cSt Oil	20– 500 LPM 5.0 - 500LPM
Wetted materials - Body - Gears - Seal - Magnet	316 Stainless steel Carbon filled PEEK™ Viton™ Ceramic
Accuracy - Water - 30 cSt oil	± 1.0 % Reading ± 0.5% Reading
Repeatability	± 0.1%
Detector type	Hall effect
Terminations	M12 gland
Approximate 'K' factor - Pulses/Litre	15

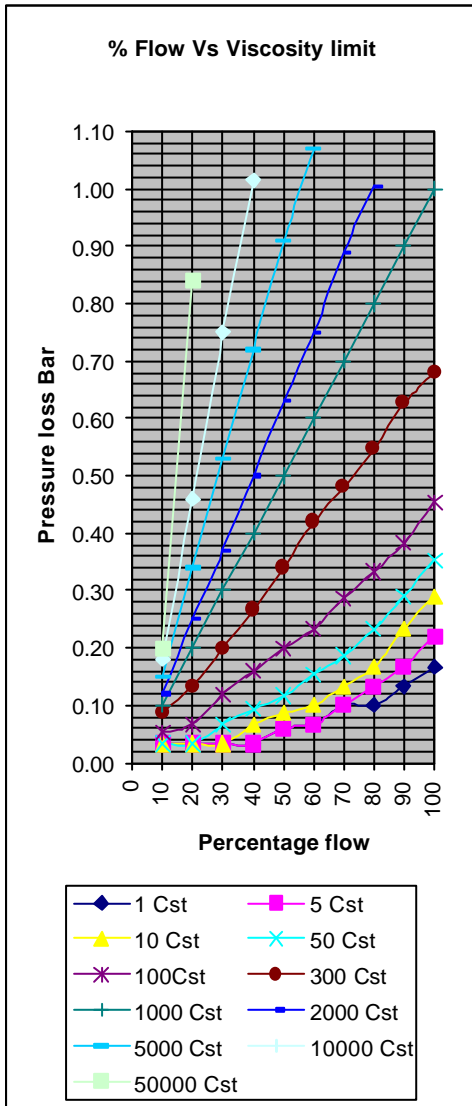

At the heart of the meter are a pair of toothed oval gears one of which contains chemically resistant magnets, the gears rotate freely on robust bearings. Rotation is detected through the chamber wall by a Hall effect detector or a reed switch giving approximately 15 pulses per litre passed. The output is an NPN pulse or a voltage free contact closure either of which is readily interfaced with most electronic display or recording devices. This combination of materials and technology ensures a long life product with reliable, accurate operation throughout.

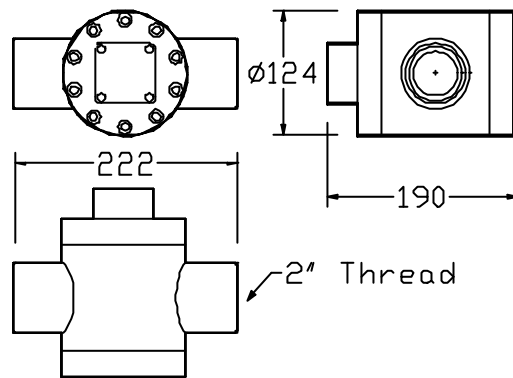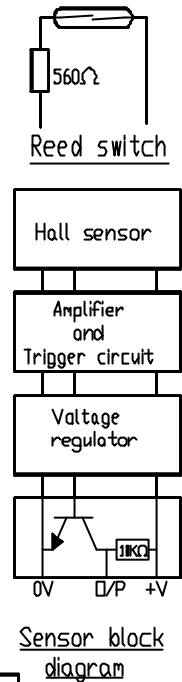

Model	Body material	Temp rating	Pressure rating	Seal material	Detector type	Pipe thread	Connections	Display mounting options
OG7 OG7	316 St St 50 Bar std	80°C 158°F	50 Bar 750 PSI 5	Viton V	Hall effect H	1/4" (OG1&2 standard) Q	BSP F B	Rate & Total on meter C
		100°C 212°F	10 Bar 150 PSI 1	Nitrile N	Reed switch R	1/2" (OG3 Standard) H	NPT F N	Rate & total Ex on meter E
		150°C 300°F	400 Bar 5880 PSI 4	EPDM E		3/4" (OG4 standard) T	Flanged (specify) F	Rate & Total plus 4-20mA U
				Kalrez K		1" (OG5 stan- dard) U		Rate & total + 4- 20mA Ex X
						1 1/2" (OG6 standard) P		Metra-Batch on meter B
						2" (OG7 stan- dard) D		Metra-Batch remote R

A stainless steel meter rated at 80°C, 50 Bar, with Viton™ seal, Hall effect detector and a 2" BSP thread would have the order code :-OG7-SS5-VHD-B